

**DEMOLITION PLAN**  
SCALE: 1/4" = 1'-0"

Detailed requirements and specifications - The contractor shall:


STRUCTURAL WORK:

1. Demolition:

- 1.1. The contractor shall Remove and properly dispose of the following items:
  - 1.1.1. Bathroom sinks, mirrors and lighting above the sinks.
  - 1.1.2. Toilets, Toilet partitions, and toilet paper dispensers.
  - 1.1.3. Urinals & urinal partition
  - 1.1.4. Kitchen cabinets, kitchen sink, drip pan for ice maker, and soap dispensers.
  - 1.1.5. Suspended ceiling system and fluorescent lights throughout the work area specified in drawings.
  - 1.1.6. Vinyl floor tile & vinyl cove base throughout the work area specified in drawings.
  - 1.1.7. Wood doors
  - 1.1.8. All unused miscellaneous wall mounted items.

NOTES:

1. The measurements and quantities furnished here are for reference only. The contractor is responsible for actual field verification prior to bidding, ordering materials and during every step of construction for existing surfaces, dimensions and conditions.
2. Repair, refinish areas damaged or disturbed by new work to be provided under this contract.
3. Properly remove, haul, and dispose of all debris. The Base Landfill may be utilized. The contractor shall not utilize the dumpster provided by Camp Lejeune for the occupants of the buildings.

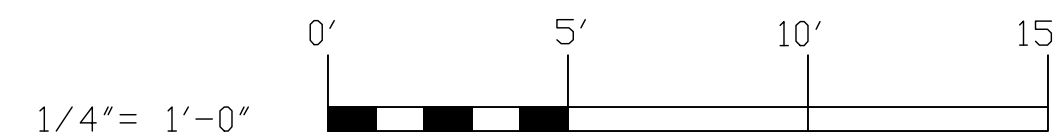

BLDG# 1700	SHEET 2 OF 7
CONTRACT# N40085-09B-0513	
DWG: DAVID BELEDNARD	MACC# 09-0513
PARTIAL RENOVATION	
USMC CAMP LEJEUNE	
A-1	